



besenzoni
LUXURY YACHT SOLUTIONS

BUC

BESENZONI UNIT CONTROL 



B L A C K V E R S I O N



**Download
Besenzoni Control Device**
from the APP Store

With **BUC** Besenzoni Unit Control you can use your smartphone to manage the handling of hydraulic combined ladder/gangway Besenzoni installed on board through bluetooth technology.

It takes two simple steps:

1 Download the App - **Besenzoni Control Device** from the Appstore and check if the App is compatible with the device's operating system: IOS10.0 or later / Android 8.0 or later

2 Purchase **BUC** - Besenzoni Unit Control (receiver/adaptor Bluetooth)

To identify which bluetooth receiver/adaptor is compatible with the combined ladder/gangway being used it is essential to provide some information:

- State the combined ladder/gangway serial number indicated in a plaque under the ladder.
- If possible state the circuit board Code:
eg. **C608SB** these codes correspond to the **7FF99619 WHITE VERSION** interface for combined ladder/gangway
eg. **RSP** this acronym corresponds to the **7FF99618 BLACK VERSION** for combined ladder/gangway.



INSTRUCTIONS FOR INSTALLATION AND USE

Important information:

Before positioning, installing and commissioning the device, read this instruction manual carefully as it contains important information on assembly, safety and use.

Do not change or tamper with any part of the device.

Improper use could harm people and/or objects.

Besenzoni S.p.A. cannot be held responsible for damages caused by failure to follow these instructions. Keep these user instructions safe and pass them on to any future users.

Only a specialised technician may install the BUC Besenzoni Unit Control contained in this box. You may find it useful to check the “Assistance and Resellers” section in the Besenzoni Control Device App, which includes a map of our official Service points that you can contact.

In questa scatola sono contenuti:

- A** 1 **BUC - Besenzoni Unit Control.**
Bluetooth Receiver / Adaptor **code 7FF99618**
to be used with up to 8 smartphones/devices.
- B** 1 connector cable for the **4 button** control panel
to control the combined LADDER/GANGWAY

BUC WHITE VERSION COD. 7FF99618 COMBINED
LADDER/GANGWAY MODELS SP 602 / SP 607 / SP 608

*The instructions for installation and use in Italian and English are available on:
www.besenzoni.it/landing/buc*



WARRANTY

Besenzoni provides a warranty for the product in compliance with the legislation in force. In case of dispute:

- a) for Italian customers, the Italian law will apply and the Court of Bergamo will be competent.
- b) for customers outside Italy the arbitrators of the International Chamber of Commerce will be competent.

BESENZONI S.p.A. Via Molere 2 - 24067 Sarnico (BG) Italy
Tel. +39 035 910456 r.a. | Fax +39 035 4261633 | info@besenzoni.it | www.besenzoni.it


INSTALLATION PROCEDURE

- Remove the power source from the system that controls the combined LADDER/GANGWAY.
- Install the **BUC** receiver/adaptor far away from heat sources and electromagnetic disturbances.
- Connect the connector cable of the **BUC** Besenzoni Unit Control to the electronic control unit of the combined ladder/gangway:
- **Option 1: In the case in which the electronic control unit is already equipped with double input (from 2018 onwards)** leave the electronic board connected **fig. C** on the control panel of the combined ladder/gangway **fig. D**.
- Connect the receiver / adapter **BUC fig. A** directly to the combined ladder/gangway electronic board shown in **fig. C** in the free socket on the electronic board.
- **Option 2: In the event that the electronic control unit does not have a double input,** use the cable **fig. B** to connect both the **BUC** and the control panel **fig. D**.
- Take note of the password on the label attached to the front of the **BUC**.
- Restore power to the system.

ADD ONE MORE BUC: If you want to add the management of a second device (eg to move both the Besenzoni combined ladder/gangway and passerelle) you can do this simply by entering the drop-down menu in the settings section and clicking on “add new device”; select the device corresponding to the name indicated on the label of the 2nd **BUC**.

PROCEDURE FOR RESETTING MEMORIZED DEVICES:

- 1) Open the lid of the **BUC** by removing the 4 screws
- 2) Press the **S1** button indicated in the image for 2 seconds until the **blue LED** goes out
- 3) Close the receiver cover.

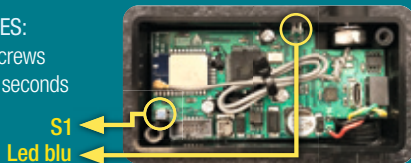

AND ACTIVATION PROCEDURE

- Activate the device's Bluetooth.
- Activate localization in case of problems in the research of the **BUC**.
- Open the **App** on your device.
- Click Settings from the dropdown menu in the top left-hand corner.
- Choose and set an unlock code which you will also use in the future.
- Deactivate the Demo mode and tick “Start in Command View”.
- Click “Set Device Code” and insert the **5 digit security code** shown on the **BUC** label.
- Click “Select device” and select the device that corresponds to the name shown on the **BUC** label: e.g. Name: Besenzoni1010.
- Click the Dropdown menu button.
- Click Command and then the screen to start the **App**.
- The commands to control the combined LADDER/GANGWAY will appear in the next screen.
- In order to correctly control the combined LADDER/GANGWAY, you must press and hold the selected command, otherwise an Error message will show up on the device's screen.
- To restart the controlling operation, press and hold the command again.



NOTE

Settings: by selecting Launch Commands when you next open the App, once you have inserted your unlock code, you will have immediate access to the commands section. Controlling the ladder/gangway via the App still allows you to use the remote control that you have been supplied with.

RESET FUNCTION: You can reset all the devices stored through the “Reset device” function in the settings menu.

